

## RIB Normal Barriers




The RIB Normal Barrier is an electro-mechanical automatic Barrier for industrial entrances, and, because of its powerful mechanical system, it can operate booms up to 8m long.

After 20 years of production and installation, our NORMAL barrier is one of the most popular and renowned Barriers, thanks to its dependability.

### Technical Data

	Normal	Normal XL
Maximum boom length	7m	8m
Opening time	11 seconds	8 seconds
Max torque	300 nm	
Power supply	230v	
Power absorbed	0.6A	
Actuator weight	145 KG	
Protection	IP55	

- The RIB Normal barrier is suitable for entrances up to 8m in width
- The single-phase motor (3phase for the XL model), and, oil filled gearbox are combined in a custom sealed unit rated IP55, very reliable and long lasting
- A spring counterbalancing system further increases the reliability of the normal barrier by reducing the strain on the motor and gearbox
- In the event of power failure, the Normal barrier can be raised manually using the supplied hand crank
- Complete with electronic control board and mechanical clutch
- Cataphoresis treated stove enamelled finish to RAL 7001 (Grey)

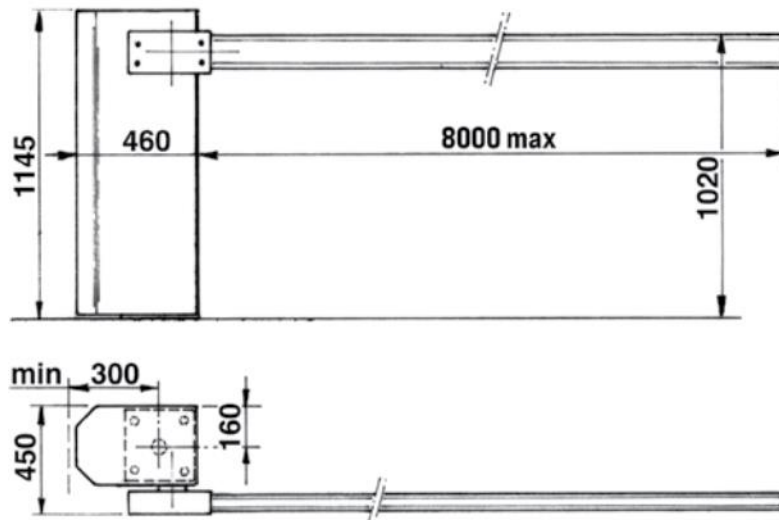

Dimensions in mm

For more information about our RIB Normal automatic barriers please contact us on  
 01254 234248 or [sales@automatesystems.co.uk](mailto:sales@automatesystems.co.uk)