

RIB Normal

Automatic Barriers

Available with a maximum boom length of 8 metres

Normal XL model allows for up to 8 metres boom length


Availability to be equipped with the P1-CRX Control Board



Technical Data

	Normal	Normal XL
Maximum boom length	7m	8m
Opening time	11 seconds	8 seconds
Max torque	300 nm	
Power supply	230v	
Power absorbed	0.6A	
Actuator weight	145 KG	
Protection	IP55	

- The RIB Normal barrier is suitable for entrances of up to 8 metres
- The single-phase motor (3phase for the XL model), and, oil filled gearbox are combined in a custom sealed unit rated IP55, very reliable and long lasting
- A spring counterbalancing system further increases the reliability of the normal barrier by reducing the strain on the motor and gearbox
- In the event of power failure, the Normal barrier can be raised manually using the supplied hand crank
- Complete with electronic control board and mechanical clutch
- Cataphoresis treated stove enamelled finish to RAL 7001 (Grey)

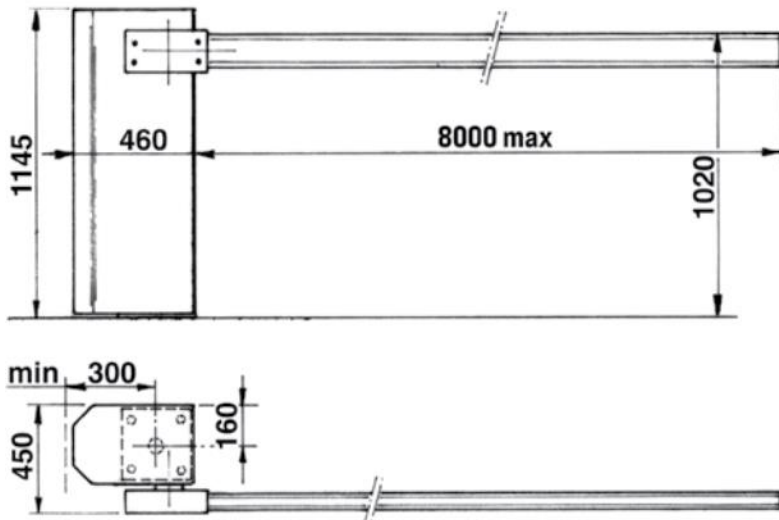

Dimensions in mm

For more information about our RIB Normal barriers
please contact us on:

0800 169 8688 or sales@automatesystems.co.uk