

Full Height Turnstile Single and Double units available

One Directional or Bi-Directional options for all models


100% Duty Cycle Product

Access Control Mountings for Entry and Exit

15 to 22 Person Flow Rate in Single Direction



Unit 7B Petre Court, Petre Road Clayton le Moors, Lancashire, BB5 5HY 01254 234248 – sales@automatesystems.co.uk






Technical Specification

- A full height turnstile is 3 wing 120º approx. 235KG per turnstile
- Available in single and double walkway models
- 100% duty cycle product
- Fabricated from all welded steel sections and plate
- Twin side frames: 33mm Ø tube welded to curve base plate
- Rotor: 76mm Ø tube with bottom support bearing
- Arms: 42mm Ø tube with capped ends
- Cable routes through side frames
- Single Phase 230v, 50Hz, 5 Amps
- Overall size: Single 1410mm x 1250mm x2225mm
 - Double 2810mm x 1250mm x 2225mm
- Finish: Pre-treated & Polyester powder coated
- Access control mountings IN & OUT
- Manual key override separate in each direction
- Bi-directional control-Fail Safe or Fail Secure
- Flow rate: 15 to 22 / min in single direction
- Manual key release in both directions

Single, Full Height Turnstile Dimensions

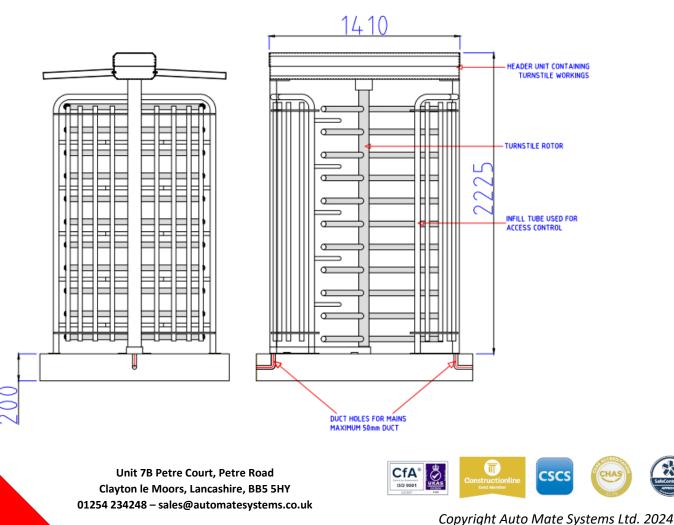

Standard Colour Options

RAL 1021 – Yellow (Rapeseed Yellow)

RAL 2000 – Orange (Yellow Orange)

RAL 3020 – Red (Traffic Red)

RAL 5005 – Blue (Signal Blue)

RAL 5015 – Blue (Sky Blue)


RAL 5017 – Blue (Traffic Blue)

RAL 6005 - Green (Moss Green)

RAL 9005 – Black (Jet Black)

RAL 9010 - White (Pure White)

Single, Full Height Turnstile with Pedestrian Gate Dimensions

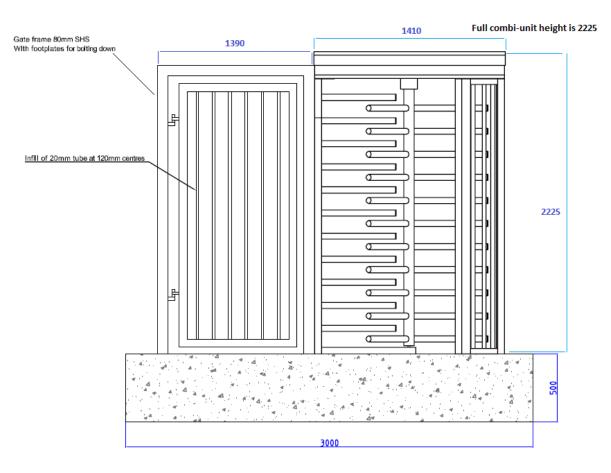

For more information about our Full Height Turnstiles, please contact us on:

0800 169 8688 or sales@automatesystems.co.uk

Unit 7B Petre Court, Petre Road Clayton le Moors, Lancashire, BB5 5HY 01254 234248 – sales@automatesystems.co.uk



Copyright Auto Mate Systems Ltd. 2024